

NETWORK CAMERA

FIB-5510RAGP


실내외형 5M IP 카메라



특징

- Sony 1/2.8" STARVIS 5MP CMOS Sensor
- 2.7~13.5mm Motorized Lens
- 하이파워 IR LED 4EA + 상태 LED 1EA
- H.264 지원
- 2592 x 1944 5MP 고해상도
- 최대 10명 동시접속 가능
- 3축 구조
- ICR Filter Change Function
- PoE 지원

외관

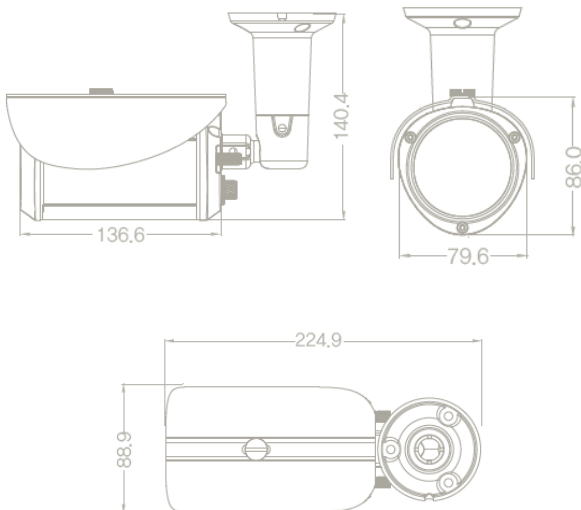

(*) 제품의 사양은 품질향상을 위해 사전 예고 없이 변경 될 수 있습니다.

사양

카메라	
Focus	Auto Focus / 2.7mm~13.5mm
Image Sensor	Sony 1/2.8" STARVIS CMOS 5MP Sensor (IMX335)
Number of Effective Pixel	2592 x 1944 Pixels
Min.Illumination	Color : 0.5 Lux BW(IR on) : 0 Lux
CVBS	-
ICR for Day & Night	Yes
IR LED	하이파워 IR LED 4EA
IR Distance	30M
OSD	Through Web
Day & Night	Auto / Color / BW / EXT
WDR	On / Off
Back Light Compensation	On / Off
3DNR	Auto
LENS	2.7~13.5mm Motorized Lens
Motion Detection	Yes
Privacy Mask	4 Blocks (On / Off)
Digital Zoom	x16 (On / Off)
Shutter Speed	Auto / Manual (1/30 ~ 1/30,000 Sec)
Slow shutter	Auto/Off
AGC	Auto
AWB	Auto / Manual/ATW
Image Effect	Mirror, Flip
Defog	On/Off

네트워크	
Ethernet	RJ-45 (10/100 Base-T)
Connection Mode	Fixed IP, DHCP,DDNS
Video compression	H.264/H.265/JPEG
Frame & Resolution	Max. 30 fps at 2592 x 1944
Dual-Stream	Main Stream(5M) & Sub-Stream(720P)
Bitrate Control	CBR/VBR, Network Bandwidth Control
Protocol	TCP/IP, HTTP, RTP/RTSP, UDP, DHCP, FTP, SMTP, NTP, ARP, ICMP, DDNS, ONVIF
Security	WS-Security, RTSP Access Control
Max. User Access	up to 16
Onvif Compliance	Yes
Remote Monitoring	All Kinds of Web Browser (I/E, Safari, Chrome, Firefox) CMS & MobileViewer (iPhone & Android)
Local Record	No
Remote Record	Yes
Local Record Mode	Motion / Continuous / Schedule
PUSH Video Call	Yes
Surge Protect	4kV
Status LED	'Green(전송중)/RED(대기중)/Green깜빡임(모션)
Intensive Record	Yes

일반	
Installation	Indoor/Outdoor
Weather Proof	Yes / IP68
Vandal Proof	Yes
Operating Temp/Humidity	-10~50 °C / Less than 90% RH
Built-in Fan & Heater	-
Input Voltage	DC12V / PoE-802.3 af
Power Consumption	550mA
Dimension	79.6 x 136.6 x 140.4 mm (WxDxH)
Cable	DC jack / Ethernet /Reset